



JOINT DETAIL

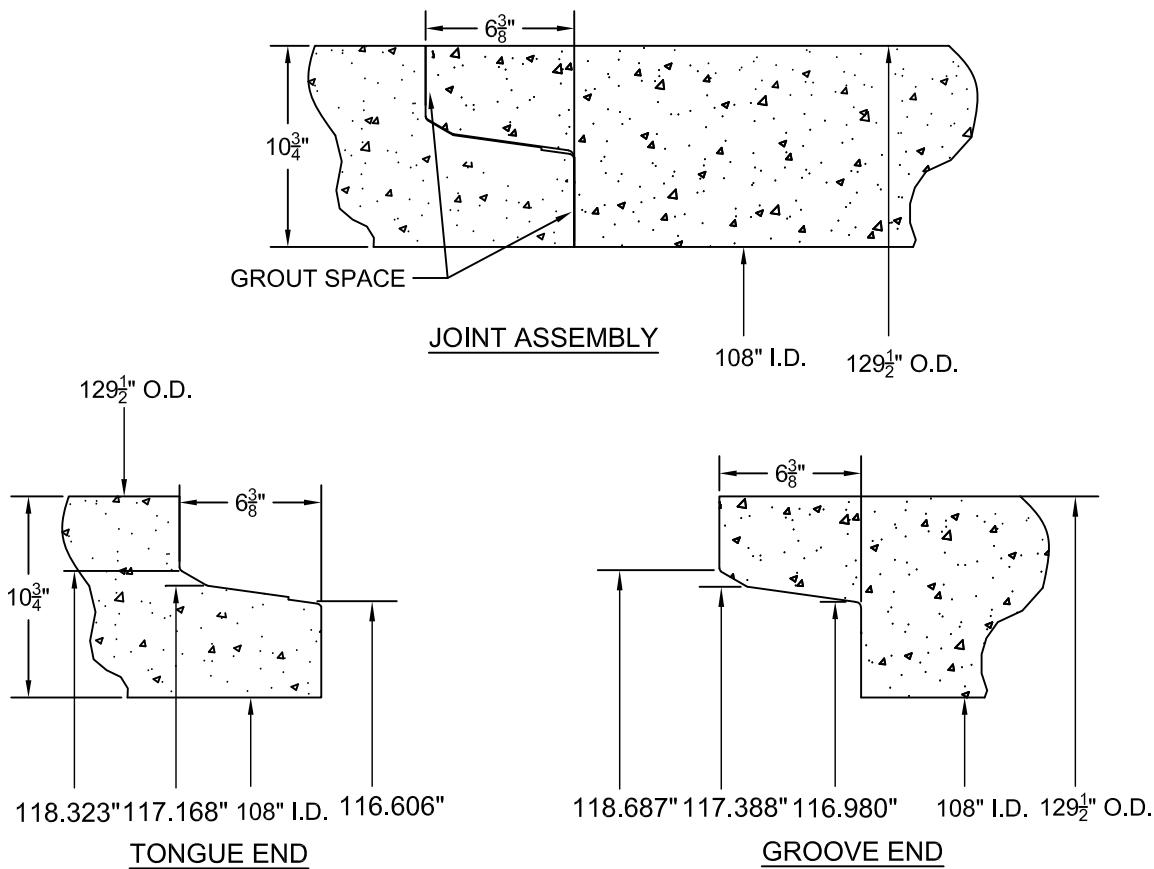

NOTES:

1. WATER TIGHT JOINTS MADE IN ACCORDANCE WITH ASTM C76/C443/C361 & C655, GREENBOOK S 207-2 AND CALTRANS S 65 REQUIREMENTS.
2. LAYING LENGTH FOR ALL PIPES IS 8' OR 4'.
3. ALL CONCRETE USED IN THE MANUFACTURE OF RCP PRODUCTS CONTAINS TYPE II/V CEMENT PORTLAND CEMENT CONFORMING TO ASTM C-150.
4. AVERAGE JOINT GAP IS 0.04' (1/2").
5. STEEL REINFORCEMENT NOT SHOWN.
6. ALL DIMENSIONS SUBJECT TO ALLOWABLE SPECIFICATION TOLERANCES AND PARAMETERS.
7. MINIMUM 22.5° RADIUS.

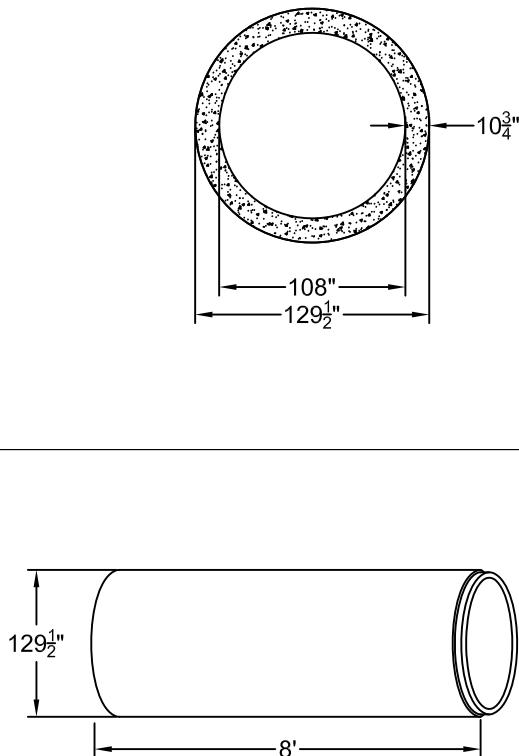

- LBS / 8' JNT = 34,320

- LBS / 4' JNT = 17,160

- LBS / LF = 4,290

SHIPPING INFO. / FULL TRUCKLOAD (8' JOINTS) :

- JOINTS = 1

- LF = 8

- WEIGHT = 34,320 LBS PAYLOAD

 THOMPSON™ PIPE GROUP LOS ANGELES	JOB NAME: STANDARD PRODUCT	108" REINFORCED CONCRETE PIPE / T&G FLUSH BELL MORTAR JOINT STANDARD DRAWING				DRAWING SCALE (UNO)
	LOCATION: TBD	DRAWN BY FB	CHECKED BY KB	PART NO. 10800080000000	DATE 10/14/2016	N.T.S.