



JOINT DETAIL

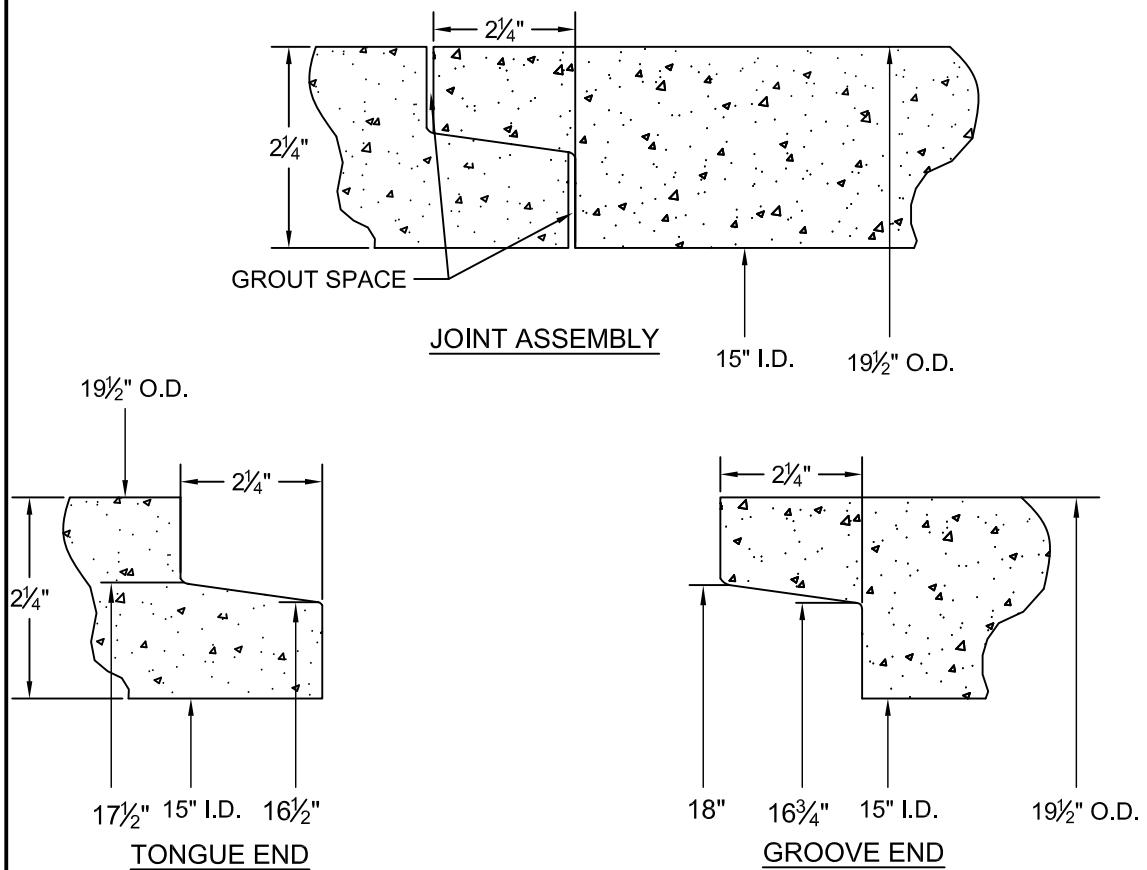

NOTES:

1. WATER TIGHT JOINTS MADE IN ACCORDANCE WITH ASTM C76/C443/C361 & C655, GREENBOOK S 207-2 AND CALTRANS S 65 REQUIREMENTS.
2. MANUFACTURED IN 8' STRAIGHT JOINTS ONLY.
3. ALL CONCRETE USED IN THE MANUFACTURE OF RCP PRODUCTS CONTAINS TYPE II/V CEMENT PORTLAND CEMENT CONFORMING TO ASTM C-150.
4. AVERAGE JOINT GAP IS 0.04' (1/2").
5. STEEL REINFORCEMENT NOT SHOWN.
6. ALL DIMENSIONS SUBJECT TO ALLOWABLE SPECIFICATION TOLERANCES AND PARAMETERS.
7. NO RADIUS AVAILABLE.

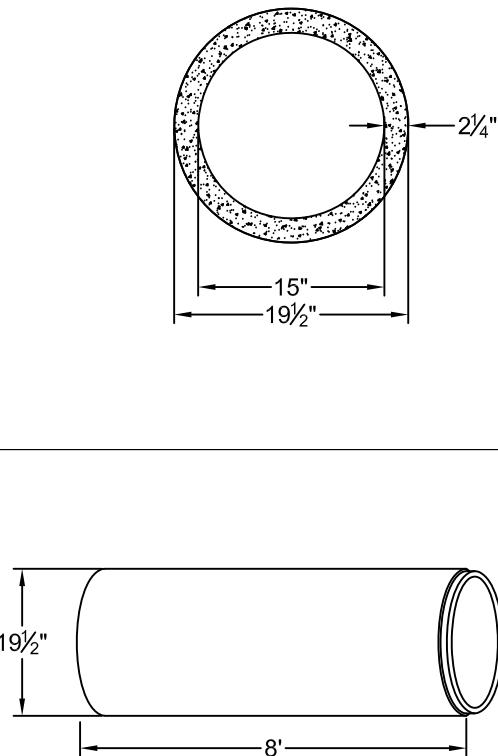

- LBS / 8' JNT = 1040
- LBS / 4' JNT = N/A
- LBS / LF = 130

SHIPPING INFO. / FULL TRUCKLOAD (8' JOINTS) :

- JOINTS = 45
- LF = 360
- WEIGHT = 46,800 LBS PAYLOAD

 THOMPSON™ PIPE GROUP LOS ANGELES
3011 NORTH LAUREL AVE. RIALTO, CA 92377

JOB NAME: STANDARD PRODUCT LOCATION: TBD	15" REINFORCED CONCRETE PIPE / T&G FLUSH BELL MORTAR JOINT STANDARD DRAWING				DRAWING SCALE (UNO)
	DRAWN BY FB	CHECKED BY KB	PART NO. 015000800000000	DATE 10/14/2016	N.T.S.
	DRAWING NUMBER T&G_15inRCP_07232012				SHEET 1 OF 1