


## JOINT DETAIL

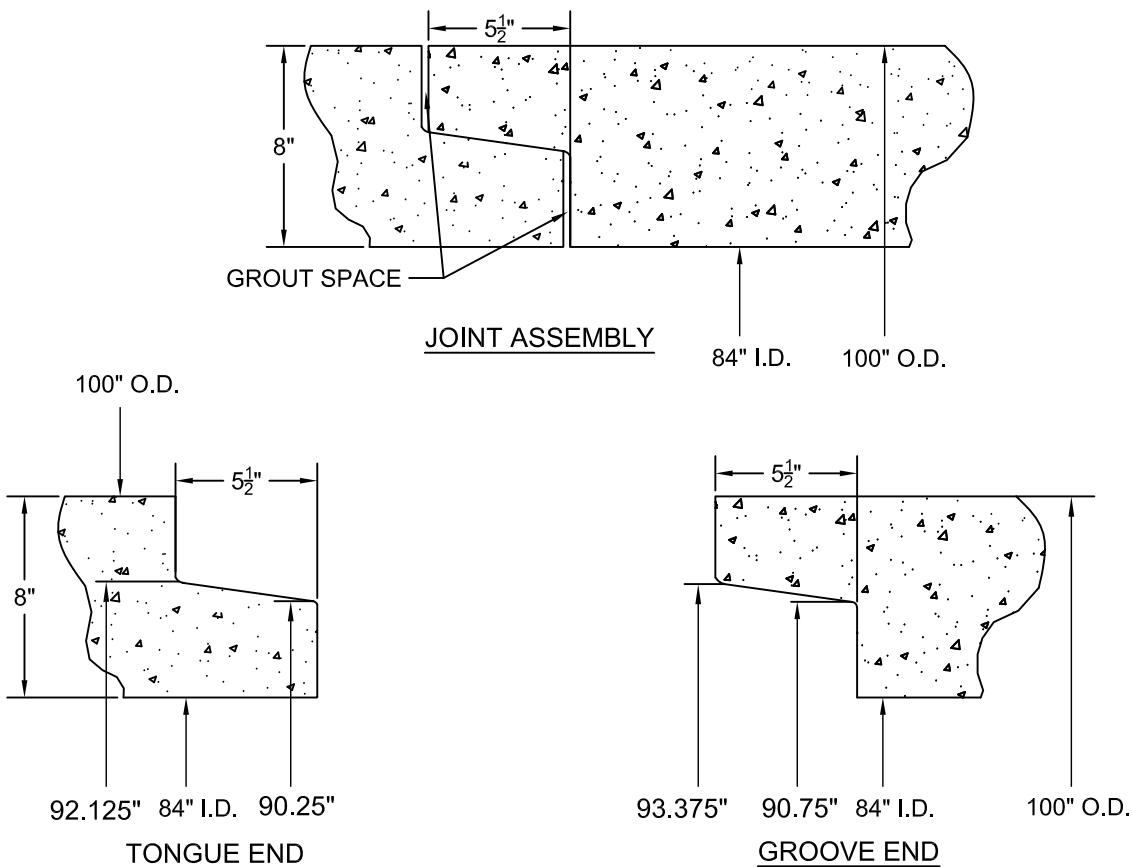


### NOTES:

1. WATER TIGHT JOINTS MADE IN ACCORDANCE WITH ASTM C76/C443/C361 & C655, GREENBOOK S 207-2 AND CALTRANS S 65 REQUIREMENTS.
2. LAYING LENGTH FOR ALL PIPES IS 8' OR 4'.
3. ALL CONCRETE USED IN THE MANUFACTURE OF RCP PRODUCTS CONTAINS TYPE II/V CEMENT PORTLAND CEMENT CONFORMING TO ASTM C-150.
4. AVERAGE JOINT GAP IS 0.04" (1/2").
5. STEEL REINFORCEMENT NOT SHOWN.
6. ALL DIMENSIONS SUBJECT TO ALLOWABLE SPECIFICATION TOLERANCES AND PARAMETERS.
7. MINIMUM 22.5° RADIUS.

- LBS / 8' JNT = 19,272
- LBS / 4' JNT = 9,636
- LBS / LF = 2,409

SHIPPING INFO. / FULL TRUCKLOAD (8' JOINTS) :

- JOINTS = 2
- LF = 16
- WEIGHT = 38,544 LBS PAYLOAD

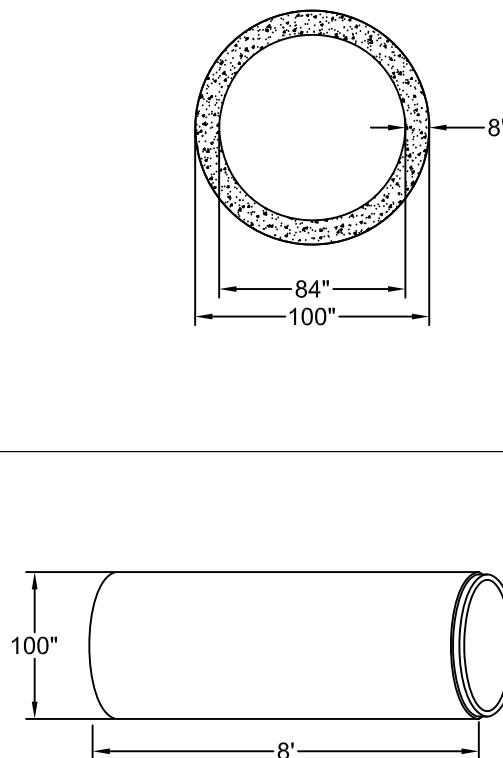

 <b>THOMPSON™ PIPE GROUP LOS ANGELES</b>	JOB NAME: STANDARD PRODUCT	84" REINFORCED CONCRETE PIPE / T&G FLUSH BELL MORTAR JOINT STANDARD DRAWING			DRAWING SCALE (UNO)
	LOCATION: TBD	DRAWN BY FB	CHECKED BY KB	PART NO. 084000800000000	DATE 10/14/2016