

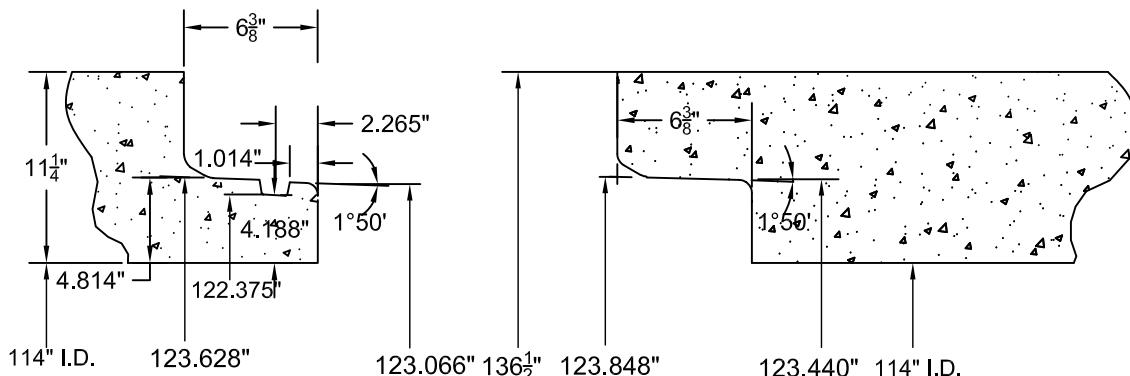
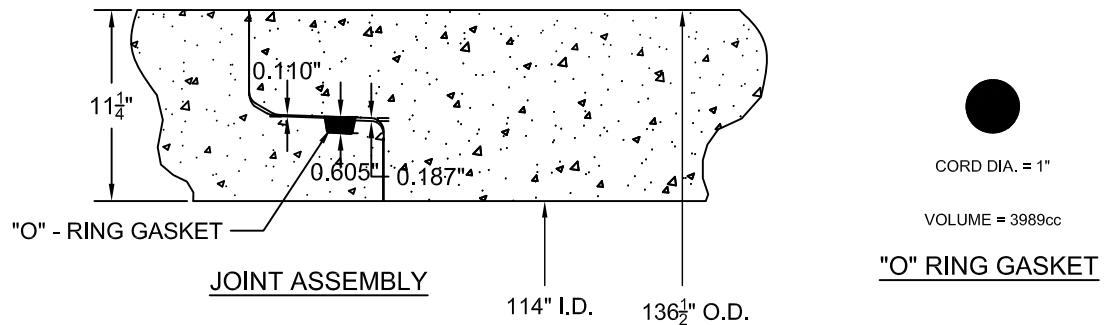


## JOINT DETAIL

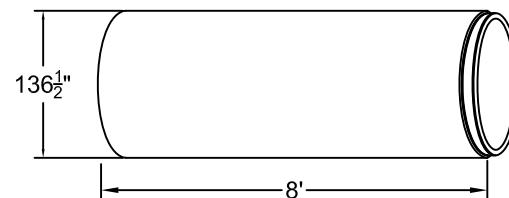

### NOTES:

- WATER TIGHT JOINTS MADE IN ACCORDANCE WITH ASTM C76/C443/C361 & C655, GREENBOOK S 207-2 AND CALTRANS S 65 REQUIREMENTS.
- LAYING LENGTHS 8' & 4' AS REQUIRED.
- ALL CONCRETE USED IN THE MANUFACTURE OF RCP PRODUCTS CONTAINS TYPE II/V CEMENT PORTLAND CEMENT CONFORMING TO ASTM C-150.
- AVERAGE JOINT GAP IS 0.04' (1/2").
- STEEL REINFORCEMENT NOT SHOWN.
- ALL DIMENSIONS SUBJECT TO ALLOWABLE SPECIFICATION TOLERANCES AND PARAMETERS.
- BEVEL PIPE FOR 45 RADIUS MINIMUM.



- LBS / 8' JNT = 34,320
- LBS / 4' JNT = 17,160
- LBS / LF = 4,290

SHIPPING INFO. / FULL TRUCKLOAD (8' JOINTS) :

- JOINTS = 1
- LF = 8
- WEIGHT = 34,320 LBS PAYLOAD

THOMPSON™ PIPE GROUP LOS ANGELES	JOB NAME: STANDARD PRODUCT	114" REINFORCED CONCRETE PIPE / CONFINED "O"-RING JOINT STANDARD DRAWING FOR DRYCAST				DRAWING SCALE (UNO) N.T.S.
LOCATION: TBD	DRAWN BY FB	CHECKED BY KB	PART NO. 1140008000R000	DATE 10/17/2016		
	DRAWING NUMBER ORING_114inRCP_07252012				SHEET 1 OF 1	