
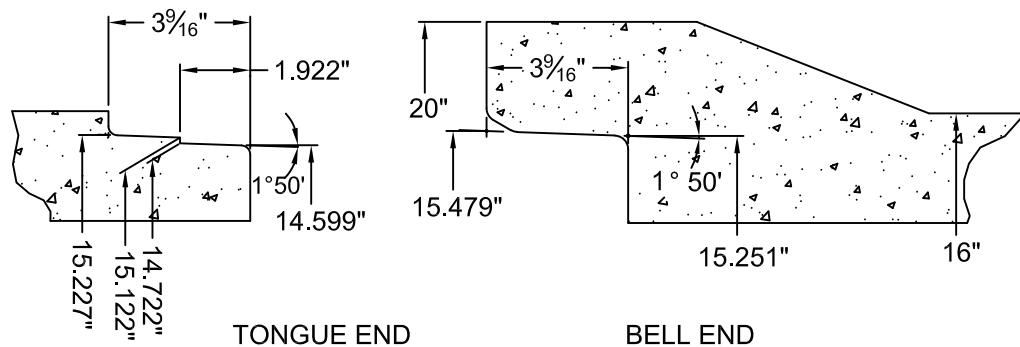
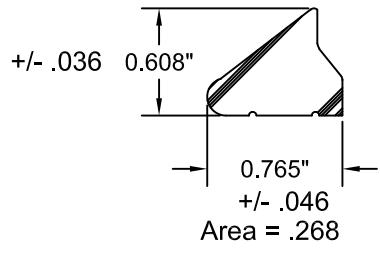




JOINT DETAIL

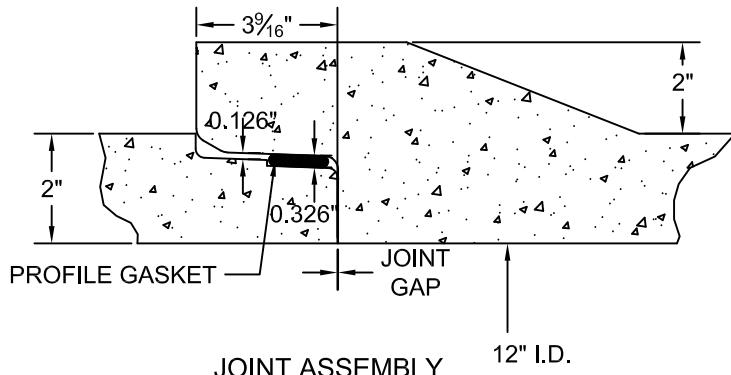

NOTES:

1. WATER TIGHT JOINTS MADE IN ACCORDANCE WITH ASTM C76/C443/C361 & C655, GREENBOOK S 207-2 AND CALTRANS S 65 REQUIREMENTS.
2. MANUFACTURED IN 8' STRAIGHT JOINTS ONLY.
3. ALL CONCRETE USED IN THE MANUFACTURE OF RCP PRODUCTS CONTAINS TYPE II/V CEMENT PORTLAND CEMENT CONFORMING TO ASTM C-150.

4. AVERAGE JOINT GAP IS 0.04' (1/2").
5. STEEL REINFORCEMENT NOT SHOWN.
6. ALL DIMENSIONS SUBJECT TO ALLOWABLE SPECIFICATION TOLERANCES AND PARAMETERS.
7. NO RADIUS AVAILABLE.

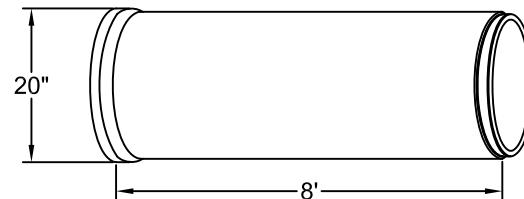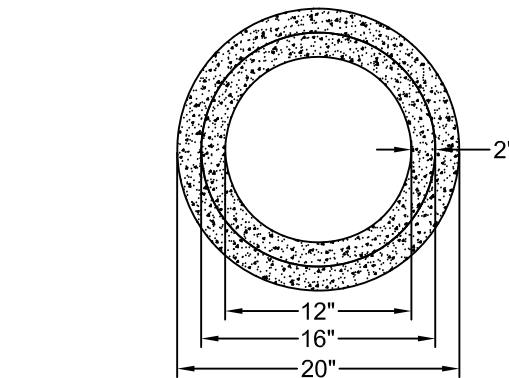

- LBS / 8' JNT = 800
- LBS / 4' JNT = N/A
- LBS / LF = 100

SHIPPING INFO. / FULL TRUCKLOAD (8' JOINTS) :

- JOINTS = 60
- LF = 480
- WEIGHT = 48,000 LBS PAYLOAD

THOMPSON™ PIPE GROUP LOS ANGELES	JOB NAME: STANDARD PRODUCT	12" REINFORCED CONCRETE PIPE/PROFILE GASKET JOINT				DRAWING SCALE (UNO) N.T.S.
		STANDARD DRAWING				
LOCATION: TBD	DRAWN BY FB	CHECKED BY KB	PART NO. 0120008000R000	DATE 10/17/2016		
				DRAWING NUMBER profile_12inRCP_07232012		SHEET 1 OF 1