

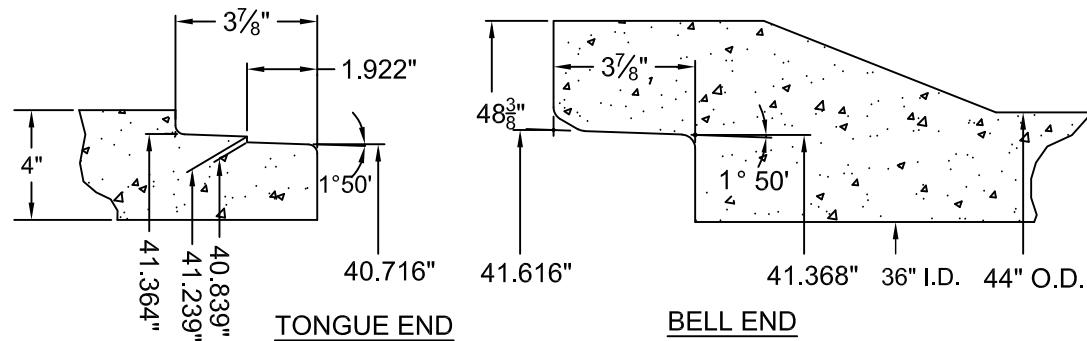
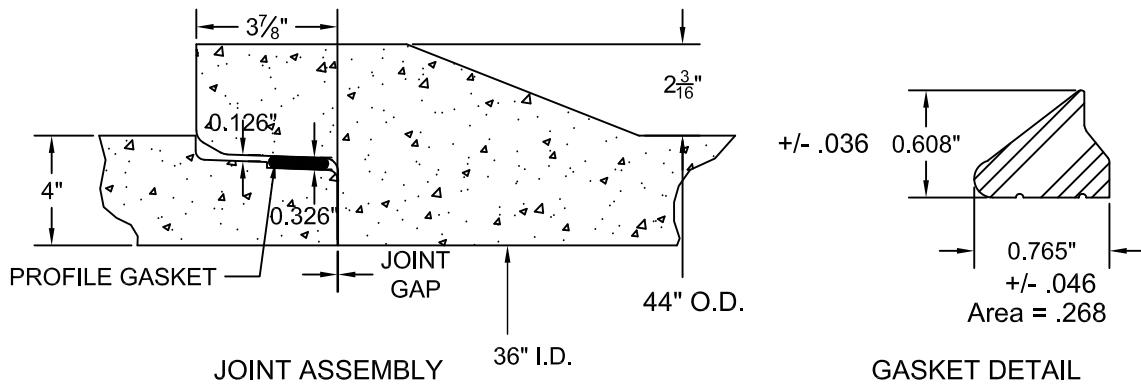


JOINT DETAIL

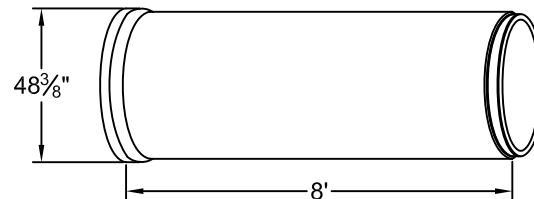

NOTES:

1. WATER TIGHT JOINTS MADE IN ACCORDANCE WITH ASTM C76/C443/C361 & C655, GREENBOOK S 207-2 AND CALTRANS S 65 REQUIREMENTS.
2. LAYING LENGTH IS 8' & 4' AS REQUIRED.
3. ALL CONCRETE USED IN THE MANUFACTURE OF RCP PRODUCTS CONTAINS TYPE II/V CEMENT PORTLAND CEMENT CONFORMING TO ASTM C-150.
4. AVERAGE JOINT GAP IS 0.04' (1/2").
5. STEEL REINFORCEMENT NOT SHOWN.
6. ALL DIMENSIONS SUBJECT TO ALLOWABLE SPECIFICATION TOLERANCES AND PARAMETERS.
7. BEVEL PIPE FOR 22.5° RADIUS MINIMUM

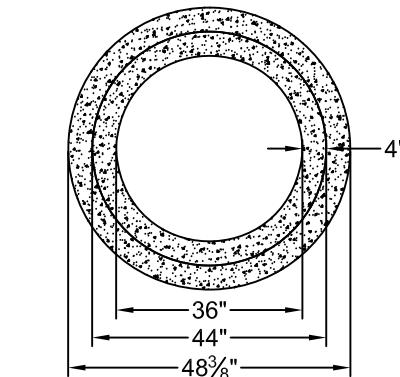

- LBS / 8' JNT = 4,480
- LBS / 4' JNT = 2,440
- LBS / LF = 560

SHIPPING INFO. / FULL TRUCKLOAD (8' JOINTS) :

- JOINTS = 10
- LF = 80
- WEIGHT = 44,800 LBS PAYLOAD

JOB NAME: STANDARD PRODUCT		36" REINFORCED CONCRETE PIPE/PROFILE GASKET JOINT STANDARD DRAWING			DRAWING SCALE (UNO)
LOCATION: TBD		DRAWN BY FB	CHECKED BY KB	PART NO. 0360008000R000	DATE 10/14/2016
		DRAWING NUMBER	profile_36inRCP_07242012		
THOMPSON™ PIPE GROUP LOS ANGELES	3011 NORTH LAUREL AVE. RIALTO, CA 92377				SHEET 1 OF 1