



## JOINT DETAIL

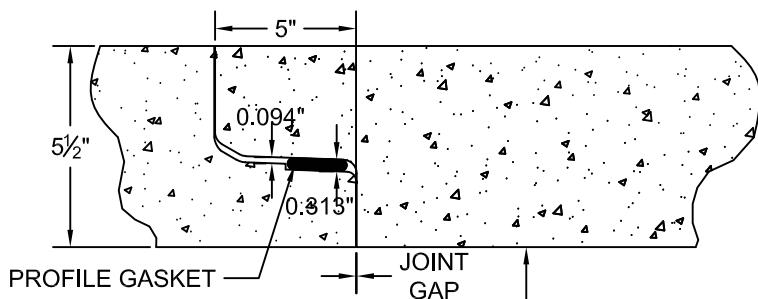


JOINT ASSEMBLY





TYPE 155 4G  
SPEC. ASTM C-443  
MANUFACTURE PRESS-SEAL  
GASKET CORP.

GASKET DETAIL

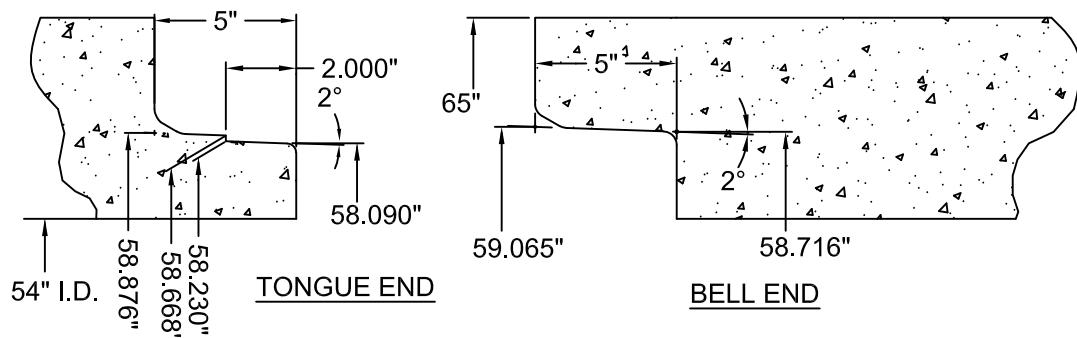

### NOTES:

- WATER TIGHT JOINTS MADE IN ACCORDANCE WITH ASTM C76/C443/C361 & C655, GREENBOOK S 207-2 AND CALTRANS S 65 REQUIREMENTS.
- LAYING LENGTH IS 8' & 4' AS REQUIRED.
- ALL CONCRETE USED IN THE MANUFACTURE OF RCP PRODUCTS CONTAINS TYPE II/V CEMENT PORTLAND CEMENT CONFORMING TO ASTM C-150.
- AVERAGE JOINT GAP IS 0.04' (1/2").
- STEEL REINFORCEMENT NOT SHOWN.
- ALL DIMENSIONS SUBJECT TO ALLOWABLE SPECIFICATION TOLERANCES AND PARAMETERS.
- BEVEL PIPE FOR 22.5° RADIUS MINIMUM

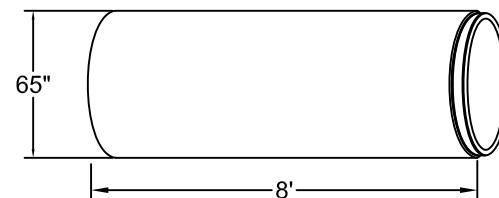

- LBS / 8' JNT = 8,688

- LBS / 4' JNT = 4,344

- LBS / LF = 1086

SHIPPING INFO. / FULL TRUCKLOAD (8' JOINTS) :

- JOINTS = 5

- LF = 40

- WEIGHT = 43,440 LBS PAYLOAD

|   |
|---|
| <p><b>THOMPSON™</b><br/>PIPE GROUP<br/>LOS ANGELES</p> <p>3011 NORTH LAUREL AVE. RIALTO, CA 92377</p> |
|---|

|                            |   |                  |                            |                               |
|----------------------------|---|------------------|----------------------------|-------------------------------|
| JOB NAME: STANDARD PRODUCT | 54" REINFORCED CONCRETE PIPE/PROFILE GASKET JOINT<br>STANDARD DRAWING |                  |                            | DRAWING SCALE (UNO)<br>N.T.S. |
| LOCATION: TBD              | DRAWN BY<br>FB  | CHECKED BY<br>KB | PART NO.<br>0540008000R000 | DATE<br>10/17/2016            |

DRAWING NUMBER  
profile\_54inRCP\_07242012

SHEET  
1 OF 1