
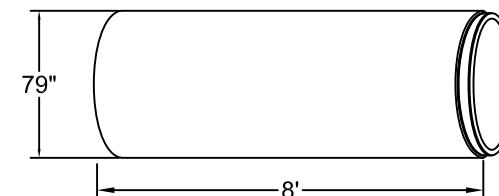
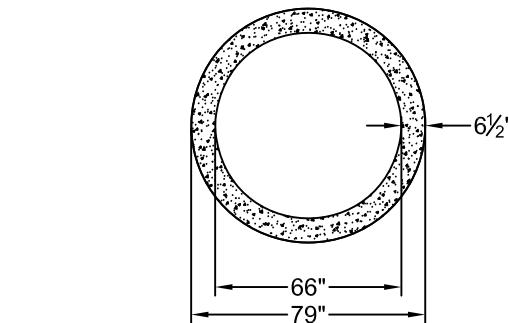
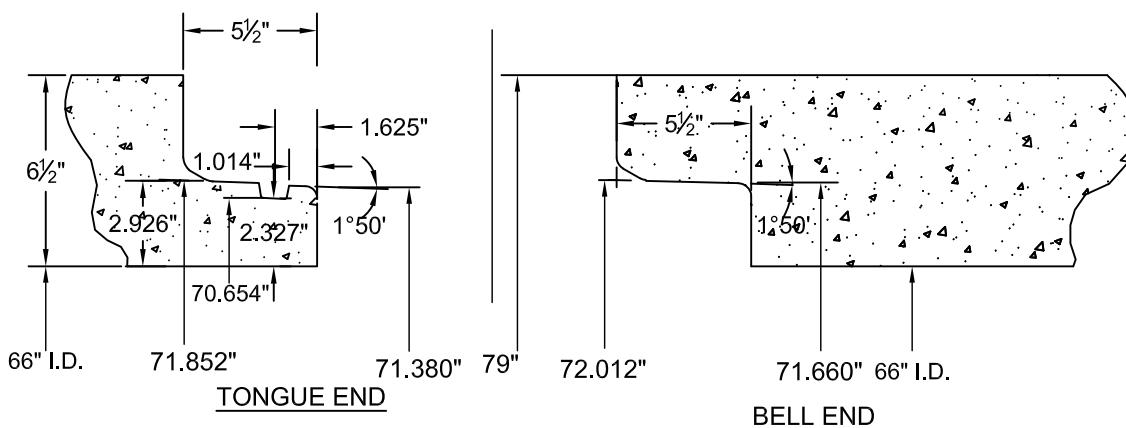


JOINT DETAIL

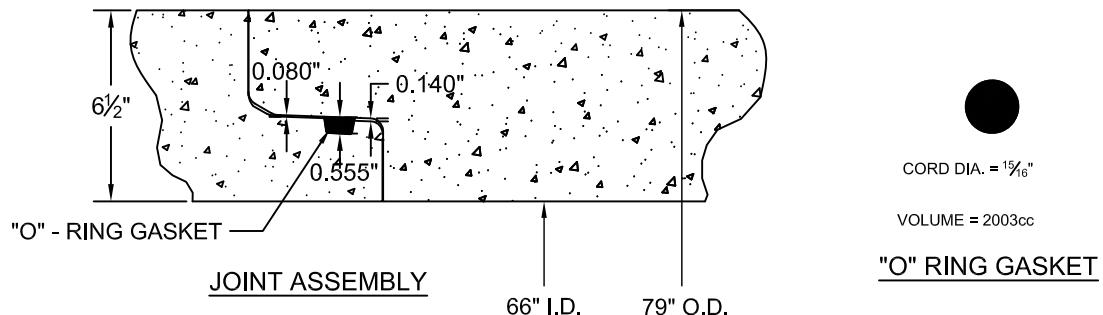

- LBS / 8' JNT = 11,920
- LBS / 4' JNT = 5,960
- LBS / LF = 1490

SHIPPING INFO. / FULL TRUCKLOAD (8' JOINTS) :

- JOINTS = 4
- LF = 32
- WEIGHT = 47,680 LBS PAYLOAD

NOTES:

1. WATER TIGHT JOINTS MADE IN ACCORDANCE WITH ASTM C76/C443/C361 & C655, GREENBOOK S 207-2 AND CALTRANS S 65 REQUIREMENTS.
2. LAYING LENGTHS 8' & 4' AS REQUIRED.
3. ALL CONCRETE USED IN THE MANUFACTURE OF RCP PRODUCTS CONTAINS TYPE II/V CEMENT PORTLAND CEMENT CONFORMING TO ASTM C-150.
4. AVERAGE JOINT GAP IS 0.04' (1/2").
5. STEEL REINFORCEMENT NOT SHOWN.
6. ALL DIMENSIONS SUBJECT TO ALLOWABLE SPECIFICATION TOLERANCES AND PARAMETERS.
7. BEVEL PIPE FOR 45 RADIUS MINIMUM.

 THOMPSON™ PIPE GROUP LOS ANGELES	JOB NAME: STANDARD PRODUCT	66" REINFORCED CONCRETE PIPE / CONFINED "O"-RING JOINT STANDARD DRAWING FOR DRYCAST				DRAWING SCALE (UNO)
	LOCATION: TBD	DRAWN BY FB	CHECKED BY KB	PART NO. 0660008000R000	DATE 10/14/2016	N.T.S.