



JOINT DETAIL

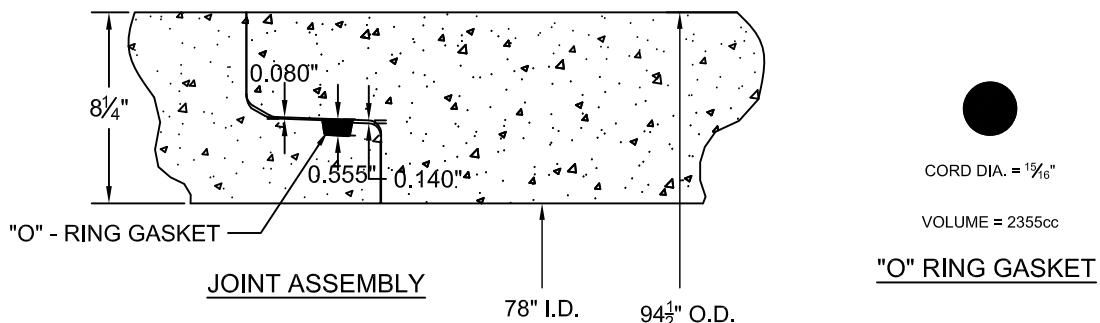

CORD DIA. = $1\frac{1}{16}$ "

VOLUME = 2355cc



"O" RING GASKET

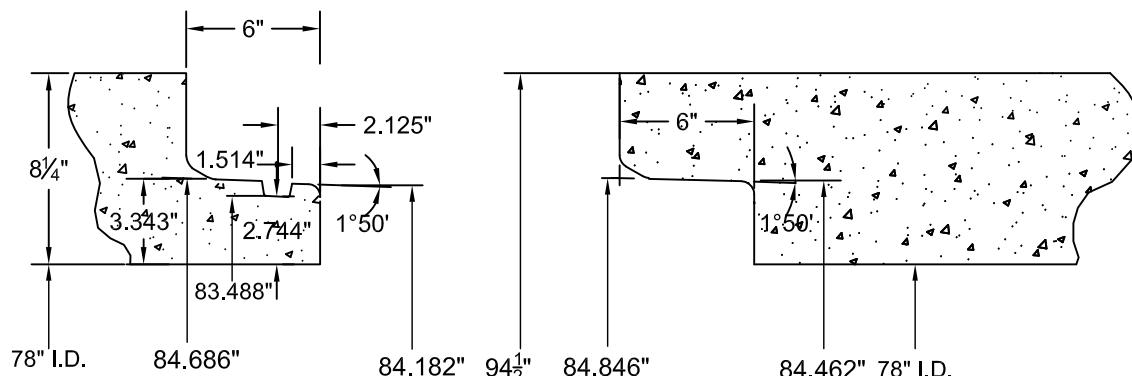

NOTES:

1. WATER TIGHT JOINTS MADE IN ACCORDANCE WITH ASTM C76/C443/C361 & C655, GREENBOOK S 207-2 AND CALTRANS S 65 REQUIREMENTS.
2. LAYING LENGTHS 8' & 4' AS REQUIRED.
3. ALL CONCRETE USED IN THE MANUFACTURE OF RCP PRODUCTS CONTAINS TYPE II/V CEMENT PORTLAND CEMENT CONFORMING TO ASTM C-150.

4. AVERAGE JOINT GAP IS 0.04' (1/2").
5. STEEL REINFORCEMENT NOT SHOWN.
6. ALL DIMENSIONS SUBJECT TO ALLOWABLE SPECIFICATION TOLERANCES AND PARAMETERS.
7. BEVEL PIPE FOR 45 RADIUS MINIMUM.

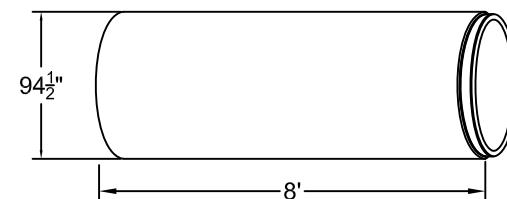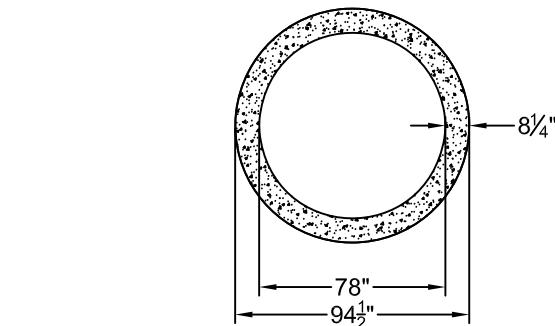

• LBS / 8' JNT = 19,280,

• LBS / 4' JNT = 9,640

• LBS / LF = 2,410

SHIPPING INFO. / FULL TRUCKLOAD (8' JOINTS) :

• JOINTS = 2

• LF = 16

• WEIGHT = 38,560 LBS PAYLOAD

 THOMPSON™ PIPE GROUP LOS ANGELES
3011 NORTH LAUREL AVE. RIALTO, CA 92377

JOB NAME: STANDARD PRODUCT	78" REINFORCED CONCRETE PIPE / CONFINED "O"-RING JOINT STANDARD DRAWING FOR DRYCAST			DRAWING SCALE (UNO) N.T.S.
LOCATION: TBD	DRAWN BY FB	CHECKED BY KB	PART NO. 0780008000R000	DATE 10/14/2016

DRAWING NUMBER
ORING_78inRCP_07242012

SHEET
1 OF 1